

FIG. 1

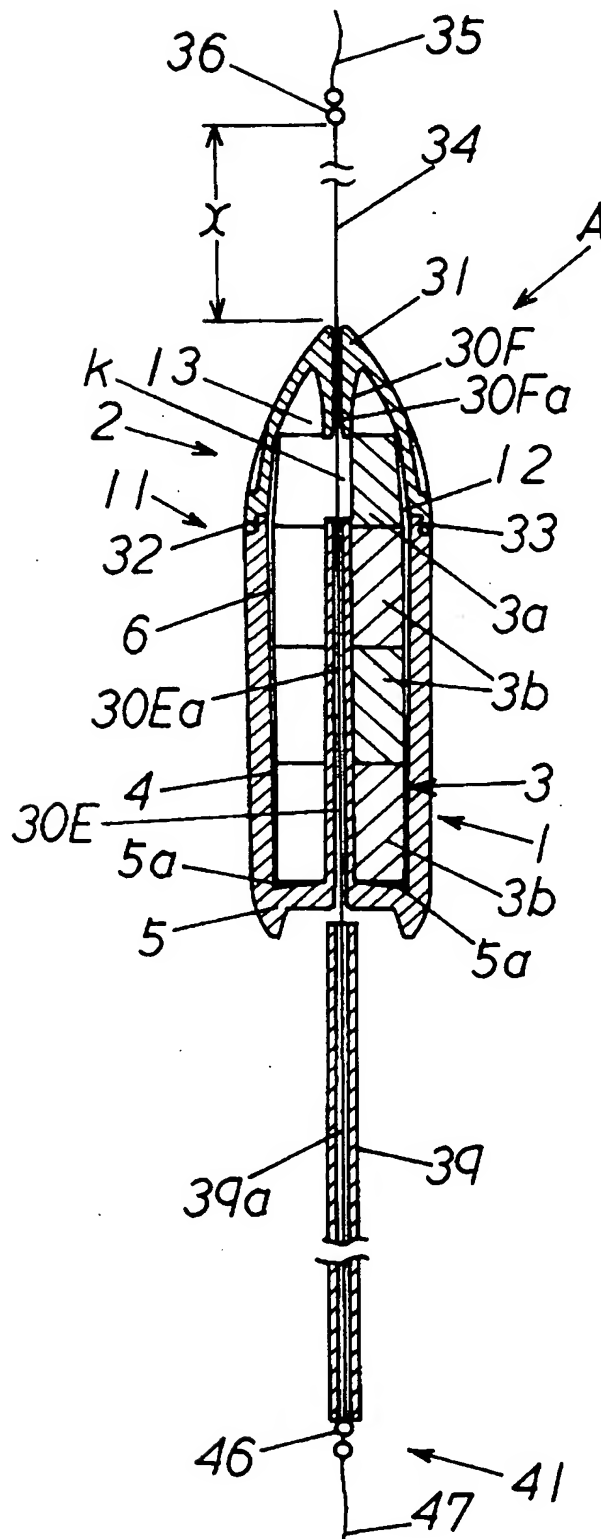


FIG. 2

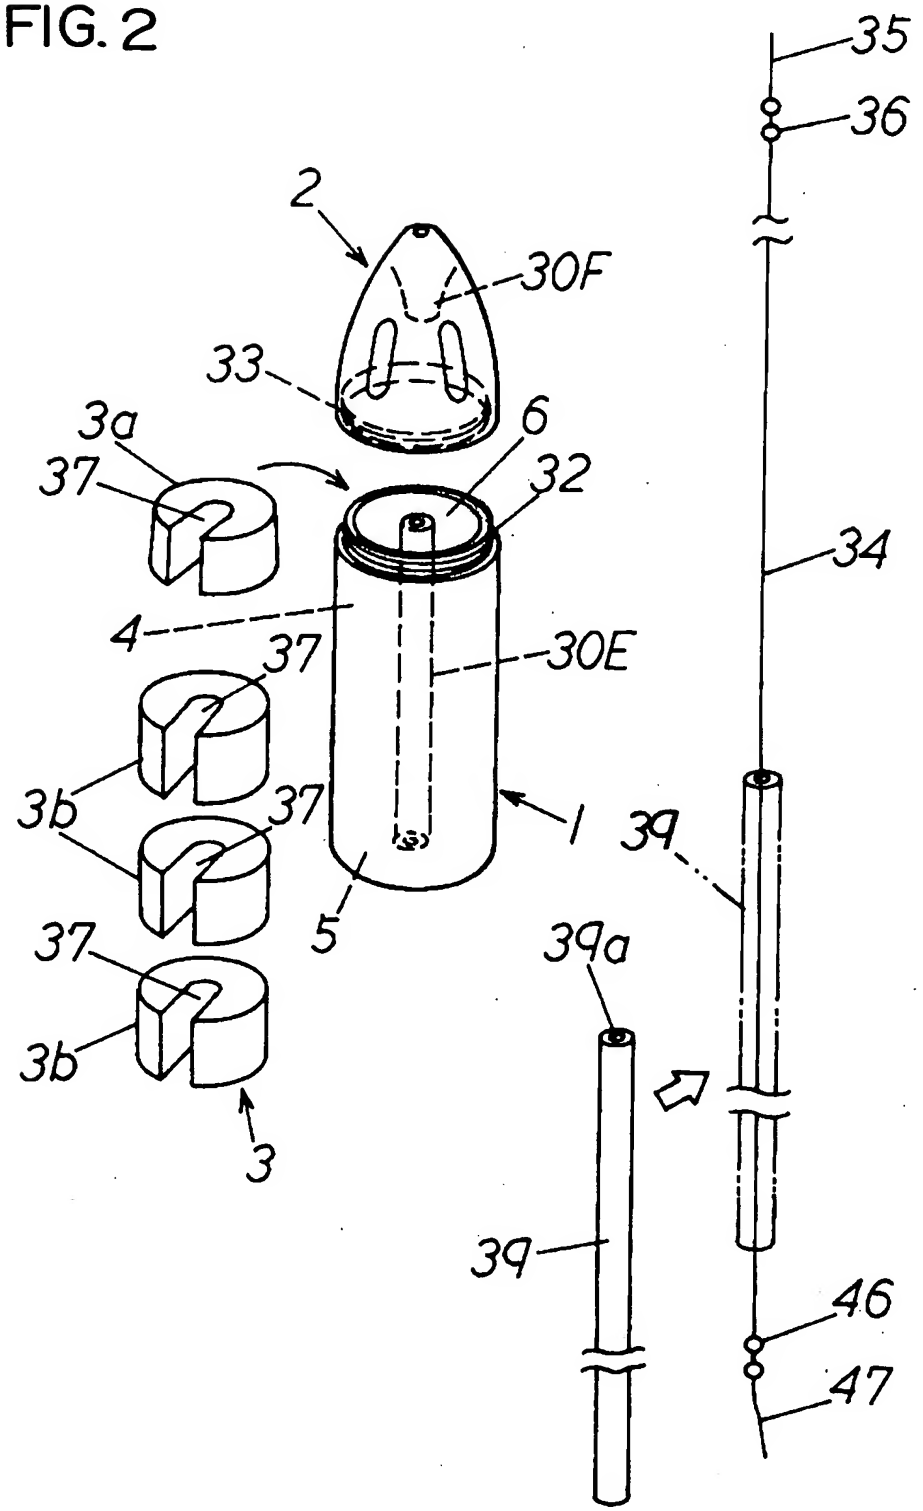


FIG. 3

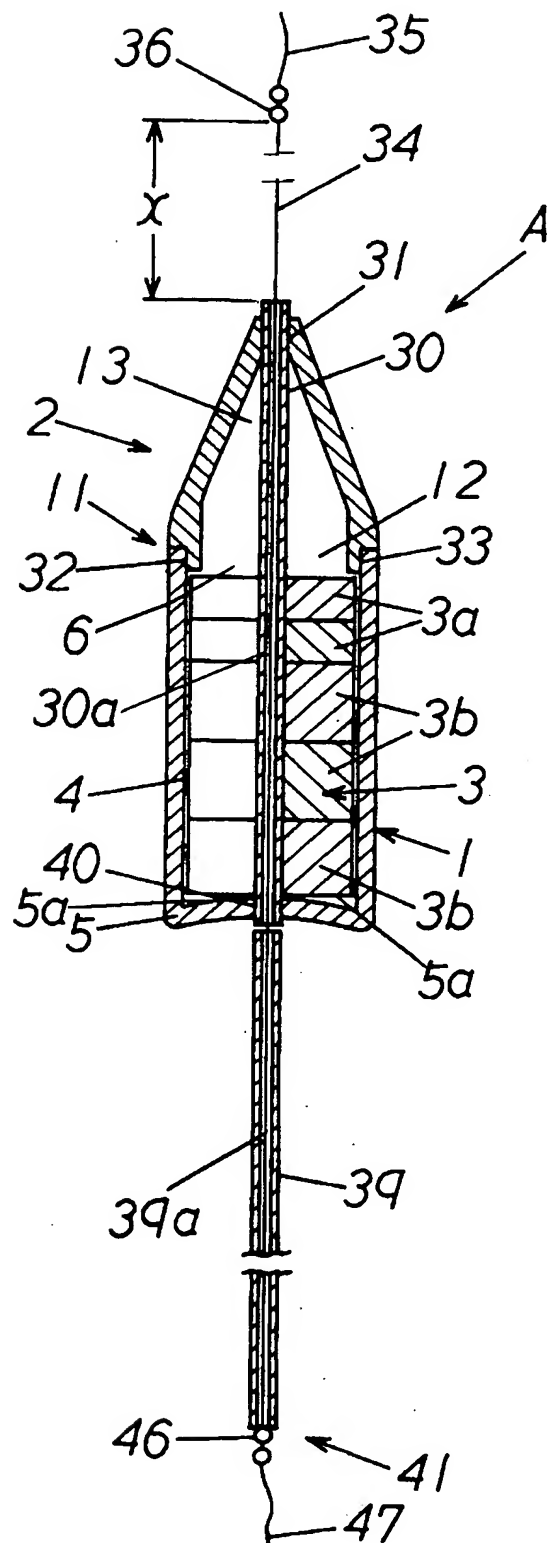


FIG. 4

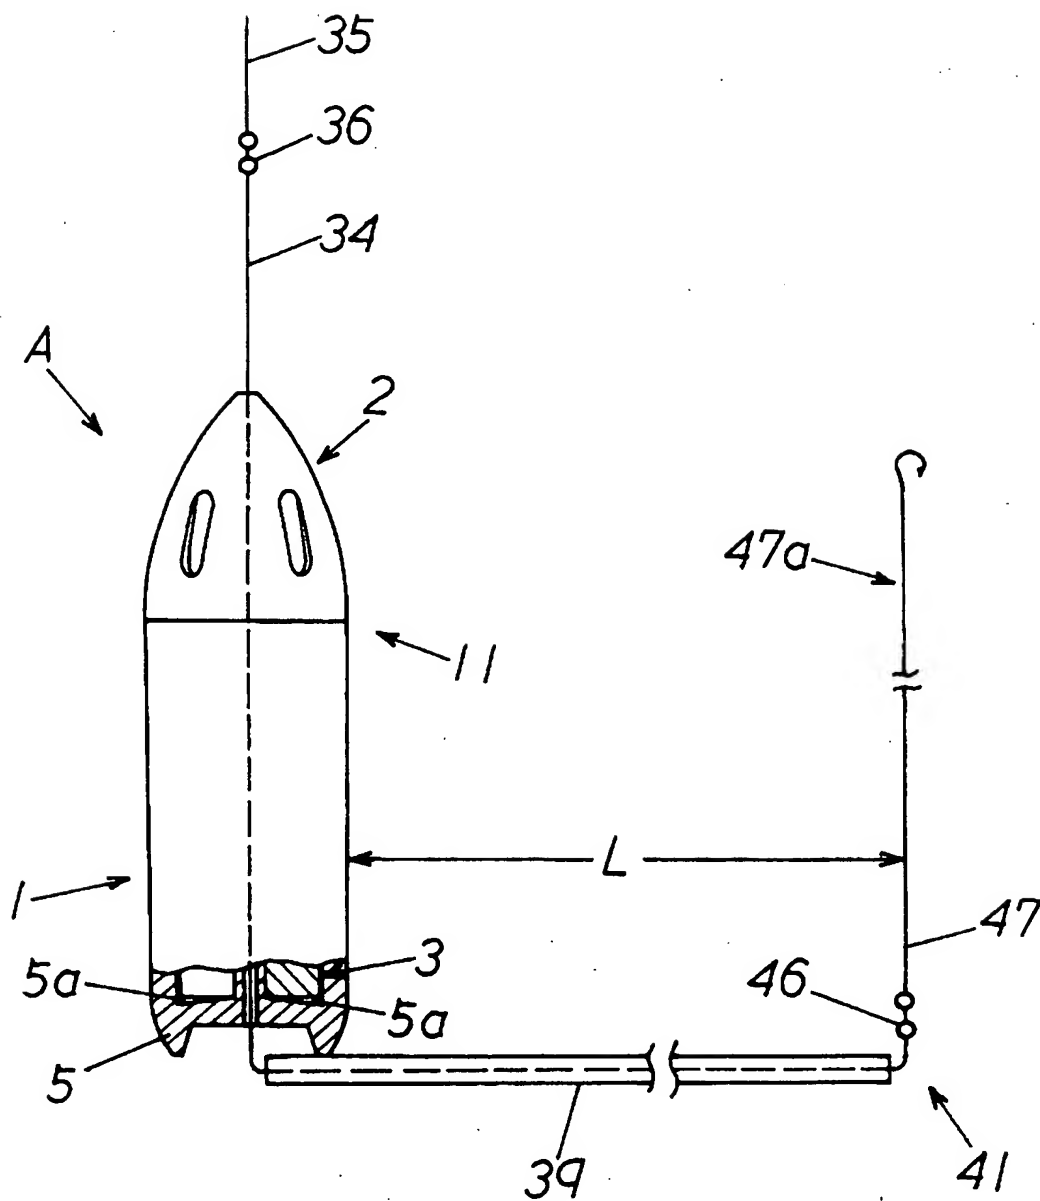


FIG.5


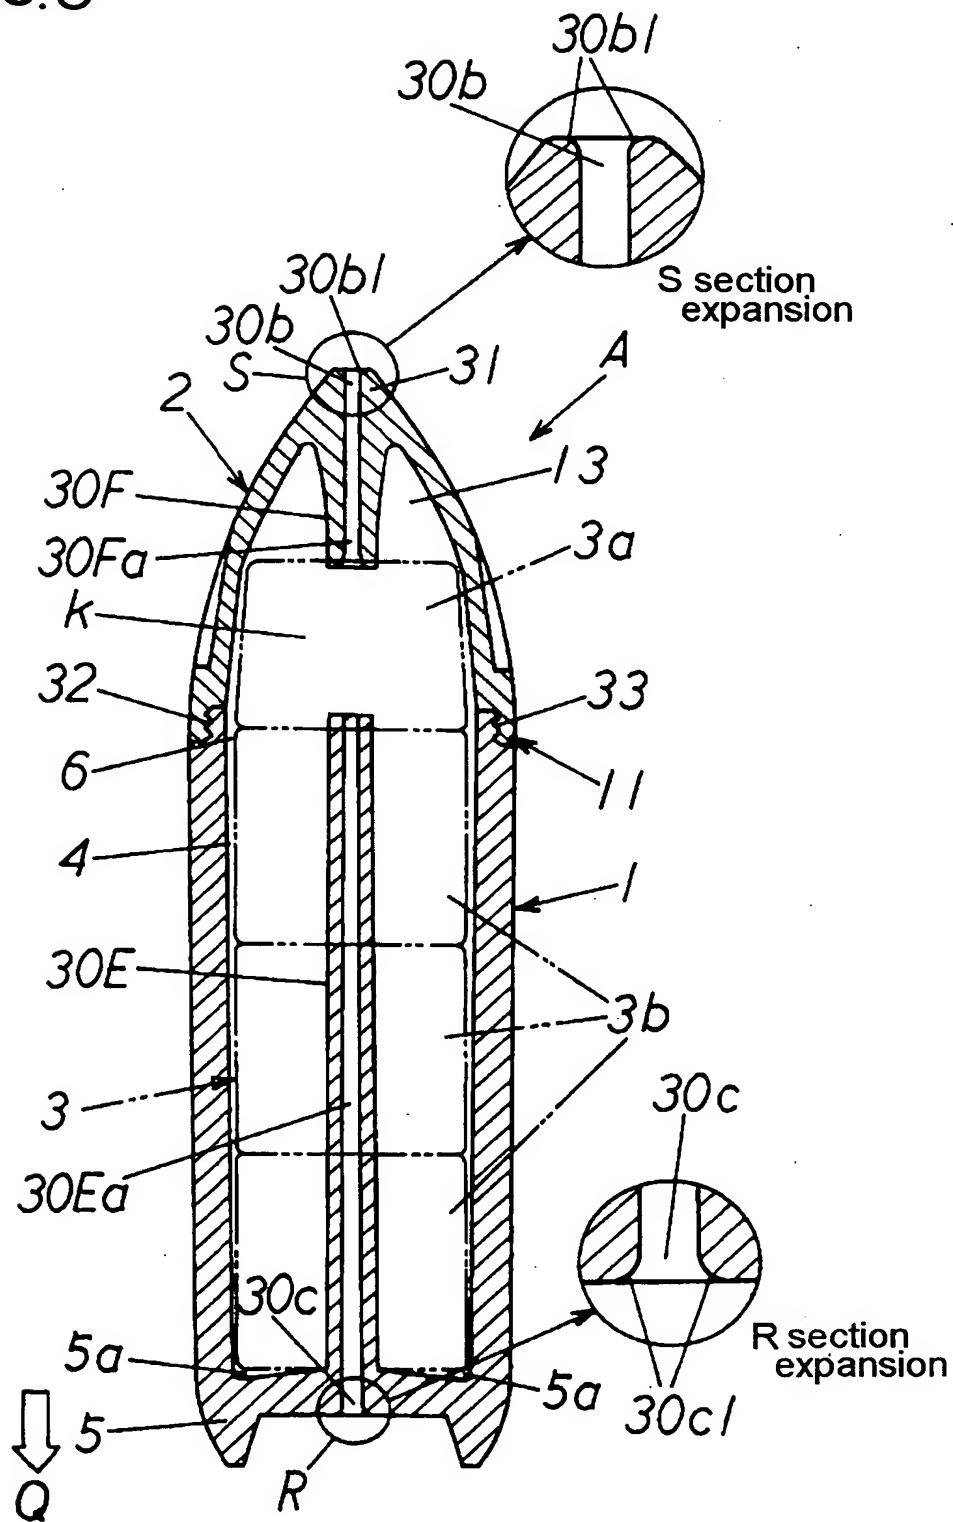


FIG. 6

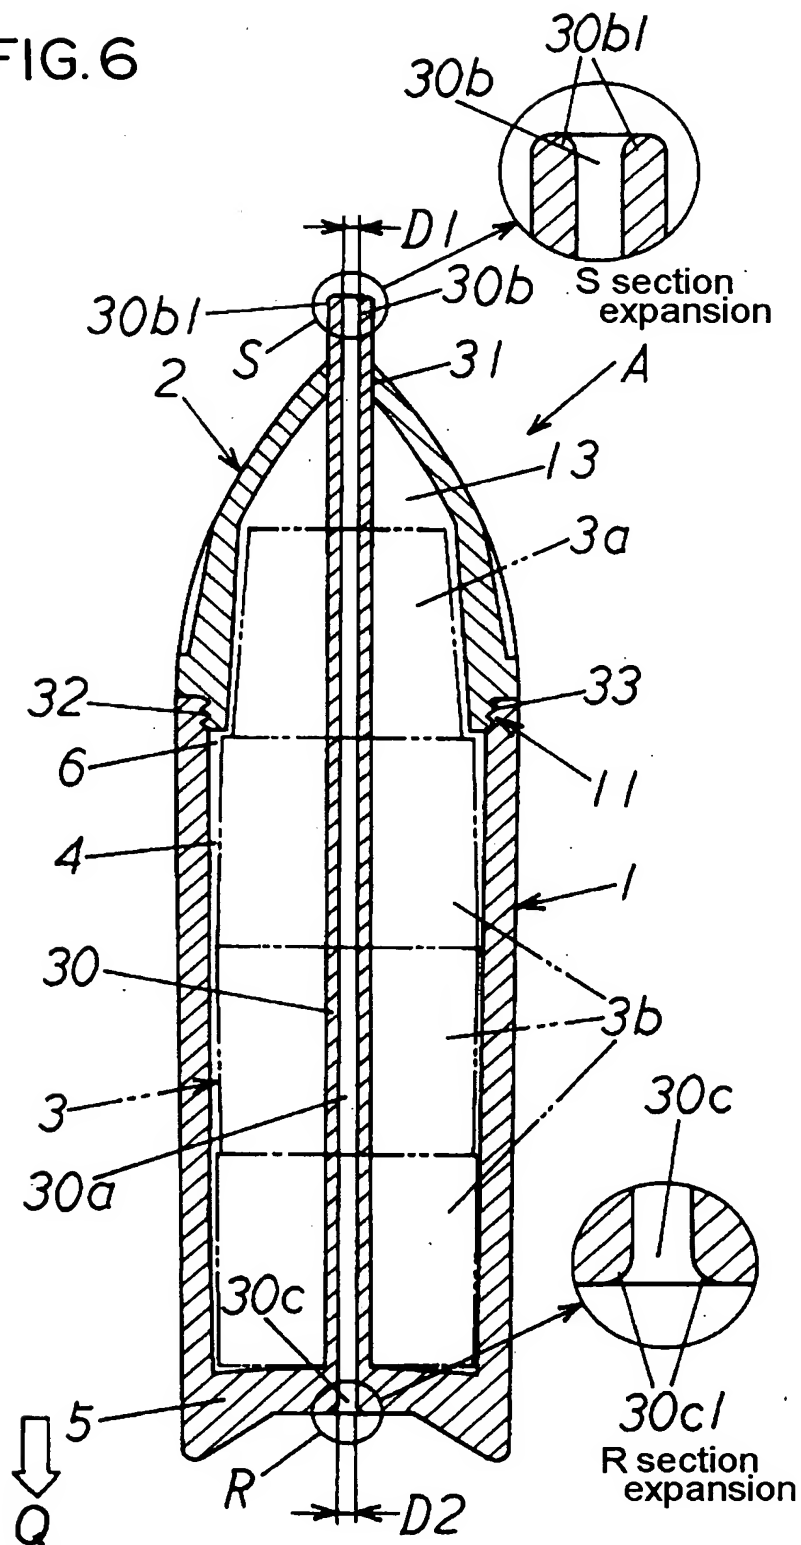

K-2157  
12/10

FIG. 7

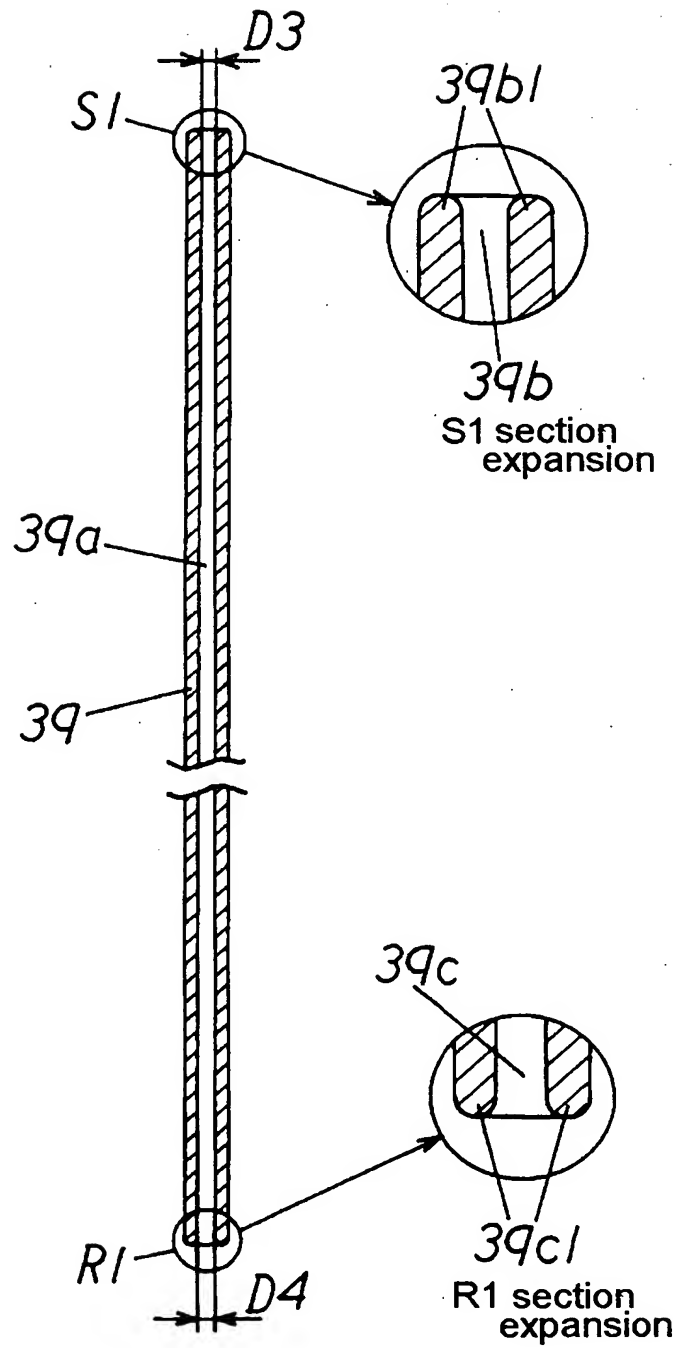


FIG.8

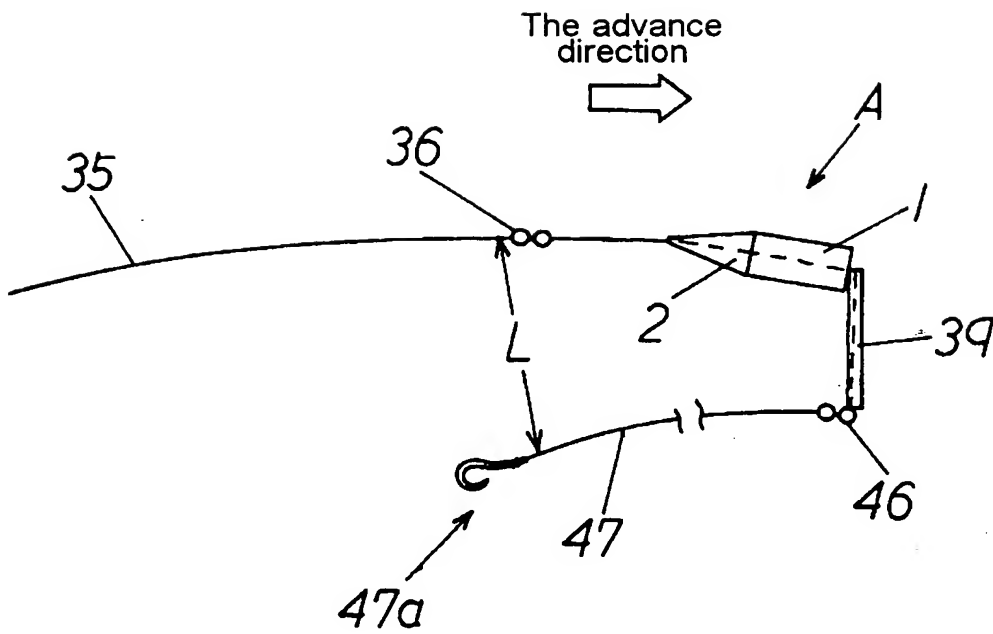






Diagram of a mechanical assembly 74. It features a horizontal member 73 and a vertical member 72. The vertical member 72 has a series of three rings at its top, labeled 75. A component 70 is mounted on the vertical member 72, with a part 71 indicated. The horizontal member 73 is connected to the vertical member 72 at a pivot point 76a. Another pivot point 75a is located at the bottom of the vertical member 72. A cable or wire is attached to the left end of the horizontal member 73.